

Page 1 of 1 Pages

INSTRUCTIONS FOR COMPLETING DD FORM 1423

(See DoD 5010.12M for detailed instructions.)

FOR GOVERNMENT PERSONNEL

- Item A. Self-explanatory.
- Item B. Self-explanatory.
- Item C. Mark (X) appropriate category: TDP - Technical Data Package; TM - Technical Manual; Other - other category of data, such as 'Provisioning', 'Configuration Management', etc.
- Item D. Enter name of system/item being acquired that data will
- Item E. Self-explanatory (to be filled in after contract award).
- Item F. Self-explanatory (to be filled in after contract award).
- Item G. Signature of preparer.
- Item H. Date CDRL was prepared.
- Item I. Signature of CDRL approval authority.
- Item J. Date CDRL was approved.
- Item 1. See DoD FAR Supplement Subpart 4.71 for proper numbering.
- Item 2. Enter title as it appears on data acquisition document cited in Item 4.
- Item 3. Enter subtitle of data item for further definition of data item (optional entry).
- Item 4. Enter Data Item Description (DID) number, military specification number, or military standard number listed in DoD 5010.12-L (AMSDL), or one-time DID number, that defines data content and format requirements.
- Item 5. Enter reference to tasking in contract that generates requirement for the data item (e.g. Statement of Work paragraph number).
- Item 6. Enter technical office responsible for ensuring adequacy of the data item.
- Item 7. Specify requirement for inspection/acceptance of the data item by the Government.
- Item 8. Specify requirement for approval of a draft before preparation of the final data item.
- Item 9. For technical data, specify requirement for contractor to mark the appropriate distribution statement on the data (ref DoDD 5230.24).
- Item 10. Specify number of times data items are to be delivered.
- Item 11. Specify as-of date of data item, when applicable.
- Item 12. Specify when first submittal is required.
- Item 13. Specify when subsequent submittals are required, when applicable.
- Item 14. Enter addresses and number of draft/final copies to be delivered to each addressee. Explain reproducible copies in Item 16.
- Item 15. Enter total number of draft/final copies to be delivered.
- Item 16. Use for additional/clarifying information for items 1 through 15. Examples are: Tailoring of documents cited in Item 4; Clarification of submittal dates in Items 12 and 13; Explanation of reproducible copies in Item 14; Desired medium for delivery of the data item.

FOR THE CONTRACTOR

Item 17. Specify appropriate price group from one of the following groups of effort in developing estimated prices for each data item listed on the DD Form 1423.

a. Group I. Definition - Data which is not otherwise essential to the contractor's performance of the primary contracted effort (production, development, testing and administration) but which is required by DD Form 1423.

Estimated Price - Costs to be included under Group I are those applicable to preparing and assembling the data item in conformance with Government requirements, and the administration and other expenses related to reproducing and delivering such data items to the Government.

b. Group II. Definition - Data which is essential to the performance of the primary contracted effort but the contractor is required to perform additional work to conform to Government requirements with regard to depth of content, format, frequency of submittal, preparation, control, or quality of the data item.

Estimated Price - Costs to be included under Group II are those incurred over and above the cost of the essential data item without conforming to Government requirements, and the administrative and other expenses related to reproducing and delivering such data item to the Government.

c. Group III. Definition - Data which the contractor must develop for his internal use in performance of the primary contracted effort and does not require any substantial change to conform to Government requirements with regard to depth of content, format, frequency of submittal, preparation, control, and quality of the data item.

Estimated Price - Costs to be included under Group III are the administrative and other expenses related to reproducing and delivering such data item to the Government.

d. Group IV. Definition - Data which is developed by the contractor as part of his normal operating procedures and his effort in supplying these data to the Government is minimal.

Estimated Price - Group IV items should normally be shown on the DD Form 1423 at no cost.

Item 18. For each data item, enter an amount equal to that portion of the total price which is estimated to be attributable to the production or development for the Government of that item of data. These estimated data prices shall be developed only from those costs which will be incurred as a direct result of the requirement to supply data, over and above those costs which would otherwise be incurred in performance of the contract if no data were required. The estimated data prices shall not include any amount for rights in data. The Government's right to use data shall be governed by the pertinent provisions of the contract.

REV:	ENGINEERING DATA REQUIREMENTS (ATTACHMENT "A")	
NOTE: MILITARY SPECIFICATIONS /STANDARDS WILL NOT BE FURNISHED IN THE BID SET.		
1. THE FOLLOWING INSTRUCTIONS ARE FURNISHED FOR THE MANUFACTURE OF <div style="text-align: center; font-weight: bold;">AXLE - AFT, MLG BOGIE</div>		
2. PART NUMBER <div style="text-align: center;">4G13121-101A</div>	3. NATIONAL STOCK NUMBER <div style="text-align: center;">1620 00 133 4993</div>	
4. THE FOLLOWING SPECIFICATIONS/STANDARDS, ETC., WILL BE USED IN LIEU OF THE DATA INDICATED. THE SUPERSEDED DATA WILL NOT BE FURNISHED UNLESS SO INDICATED.		
<div style="margin-left: 20px;"> <p>a. Identify to meet drawing requirements and MIL-STD-130 with the following notes, in lieu of STP63-001. Serial number shall be vibropeened, or steel stamped, in 0.09" letters 0.004" - 0.007" deep in the location indicated. If the drawing does not indicate a location, OO-ALC/LILE will provide S/N location instructions. Serialization of item shall be accomplished as follows: The serialization will begin with the CAGE of the contractor named on the contract, followed by a dash and the two (2) digit year of manufacture, followed by a dash and a sequentially unique three (3) digit number. A contractor who receives numerous intermittent contracts will start serialization of item with the next number in sequence of the prior contract. If a contract produces more than 1000 items, the serial number should appear like this: "S/N 98747-95-001"</p> <p>b. Heat treat and normalize per SAE AMS-H-6875, in lieu of STP 54-006. Any surface ground/machined after heat treat shall be inspected for burns per MIL-STD-867, grinding shall be per MIL-STD-866.</p> <p>c. Shot peen per SAE AMS-S-13165, to meet drawing requirements.</p> <p>d. Disregard flag notes 34, 35, 36, and 37 on drawing 4G13121.</p> <p>e. Use material 300M per AMS 6257, in lieu of STM 05-501.</p> </div>		
5. Finish per the following in lieu of DS 30000, and finish codes CC, D, 46, 17, 54, and 74-74.		
<div style="margin-left: 20px;"> <p>a. Cadmium plate per MIL-STD-870, Class 3, Type III. (code CC)</p> <p>b. Chromium plate per MIL-C-1501, Type II, or III, Class 3. (code D)</p> <p>c. Polyurethane coating per AMS-C-27725. (code 46)</p> <p>d. Primer wash is not required. (code 17)</p> <p>e. One coat of epoxy primer per MIL-PRF-85582, Type I, Class 2. (code 54). Alternate, One coat of epoxy primer per MIL-PRF-23377, Type I.</p> <p>f. Two coats of top coat per MIL-PRF-85285, Type I. (color white, No. 17925 per FED-STD-595). (code 74-74)</p> </div>		
6. The following specifications are not required for the manufacture of this item.		
<div style="margin-left: 20px;"> <p>a. DS 5025, Fatigue test X998, and Static test X999.</p> </div>		
PREPARED BY <div style="text-align: center;">ORIN HATCH</div>	SYMBOL <div style="text-align: center;">LGMPM</div>	DATE <div style="text-align: center;">29 Jan 01</div>

REV:	ENGINEERING DATA REQUIREMENTS CONTINUATION SHEET (ATTACHMENT "A")	
PART NUMBER 4G13121-101A	NATIONAL STOCK NUMBER 1620 00 133 4993	
<p>7. The required forgings will be procured from the qualified forging source using the original certified forging procedures and dies.</p> <p>a. Prior to contract award, the detail part bidder will provide certification, from the forging source to the government, that the certified dies and forging procedures are available and that the forging source has an agreement with the detail part bidder to provide forgings for his use in the event that he is the successful bidder.</p> <p>b. Prior to production, forging lot qualification will be accomplished as specified on the forging drawing, and MIL-F7190. The contractor will assure that this is or has been accomplished by the forging source and will submit certified documentation of accomplishment to the government.</p> <p>8. FORGING SOURCE, CONTROL AND LOCATION OF DIES:</p> <p>a. Forging drawing: 4G13123-991A Lockheed GA. CAGE 98897</p> <p>b. Control of forging: Unknown. Die number: Unknown.</p> <p>c. Location of forging: Unknown.</p> <p>9. INSTRUCTIONS FOR QUALIFICATION OF NEW FORGING DIES:</p> <p>a. Prior to contract award, the contractor shall advise the government in writing of the intent to procure new forging dies and the proposed forging source. The contractor shall not proceed to obtain new dies without the express consent of the government- procuring agency. The government shall have unlimited use of the dies developed under this contract. The contractor shall inform the forging house in writing, at the same time the order for the dies is placed, that the government has unlimited use rights of the dies and forward a copy of this letter to the Government Contracting Officer.</p> <p>10. Material Review Board disposition:</p> <p>a. OO-ALC/LILE system engineering retains all rights to review and accept MRB dispositions prior to shipment of discrepant item. All deviations, minor and major, from the engineering drawing package will be submitted for MRB disposition.</p> <p>b. Prior to contract award, the contractor will certify to the government in writing full compliance with manuals, specifications, and standards called out and required for the manufacture of this contracted landing gear component/ assembly. The contractor is responsible to completely search all required documents and fully understand the necessary requirements to manufacture the stated item. Any questions can be forwarded to this office OO-ALC/LILE</p> <p>11. After contract award the successfull bidder shall provide a copy of the processing documentation (routing documents and process specifications) to LILE for final review before production begins.</p>		
PREPARED BY ORIN HATCH	SYMBOL LGMPM	DATE 29 Jan 01

SOURCE QUALIFICATION REQUIREMENTS
(PL98-525, SECTION 2319)

STOCK NR (NSN) 1620-00-133-4493
NOUN: Aft Axle

PART NUMBER (P/N) 4G13121-101A
AIRCRAFT: C-5

SECTION C

QUALIFICATION REQUIREMENTS THAT MUST BE SATISFIED TO BECOME A QUALIFIED SOURCE:

1. Because of the need for uninterrupted item support to military aircraft systems while keeping with the requirements of PL 98-525, the current acquisition need not and generally will not be delayed to provide an offeror an opportunity to qualify. Normal acquisition practices at OO-ALC should preclude the denial of opportunity to any interested offeror.
2. The offeror must provide a pre-contract award qualification article, which meets the requirements of the engineering drawings, material specifications, and process specifications. However, successful completion of the qualification testing does not guarantee any contract award. If the offeror is deemed qualified and awarded the contract, a post-contract award first article exhibit may be required to verify production capability.
3. The qualification article will be subjected to form, fit, and function verification as well as required testing to assure compliance with data list and other applicable procurement criteria. The qualification article shall demonstrate full compatibility and comparability with existing parts.
4. The required materials will be procured from a qualified source and shall meet the requirements of their respective specifications. The offeror will assure that the supplier has accomplished this and shall submit certified documentation of accomplishment of the above requirements to the purchaser along with the pre-contract award qualification article.
5. The required forgings shall be procured from the qualified forging source using the original certified forging procedures and dies. Forging material and lot qualifications shall be accomplished as required in the specified forging drawing, P/N 4G13121-101A and specification MIL-F-7190. The offeror shall assure that this is or has been accomplished by the forging source and will submit certified documentation of accomplishment of the above requirements to the government along with the pre-contract award qualification article.
6. The qualification article once submitted will become subject to such testing as deemed necessary by the U.S. Government to prove that the article meets all dimensional, processing and functional requirements. Such testing may result in the destruction of the article. Following completion of necessary testing and evaluation, the article no matter what its condition shall be returned to the contractor or disposed of at his discretion and direction whether it was found acceptable or not.
7. Form verification: The U.S. Government's Quality Verification Center (QVC) will be used to insure compliance with the dimensional requirements of the article. Material and processing compliance will also be verified as required.
8. Fit/function verification: Existing components and government test stands and fixtures will be utilized to verify physical interface and functional performance of articles.

SOURCE QUALIFICATION REQUIREMENTS
(PL98-525, SECTION 2319)

STOCK NR (NSN) 1620-00-133-4493
NOUN: Aft Axle

PART NUMBER (P/N) 4G13121-101A
AIRCRAFT: C-5

9. Testing for material and process compliance.

- | | |
|-----------------------|----------------|
| (a) Material analysis | (e) Finish |
| (b) Heat treat | (f) Grain flow |
| (c) Grinding | (g) Other |
| (d) Plating | |

10. Remarks:

- a. Organic verification capabilities exist at OO-ALC.
- b. Testing requirements outside organic capabilities will be contracted out.

11. The estimated cost of government testing and evaluation is \$3000.

12. Maximum time for testing of the qualification article will not exceed 30 days from receipt at testing agency.

SECTION D

QUALIFICATION WAIVER REQUIREMENTS.

1. An offerer who has had previous experience in the manufacture and qualification of items, which can be correlated with this product, may apply to the design control authority at OO-ALC for a waiver of the above stated qualification requirements.

a. The qualification waiver criteria utilized by the design control authority to perform a qualification analysis are available upon request. The qualification waiver criteria may be used as a guide in preparing the offerer's written input to the design control authority.

b. The burden of proof for written inputs is on the offerer. The design control authority will not pursue authenticity verification of claims made by the offerer of product manufacturing experience with other Government or non-Government agencies. Unsubstantiated claims will not be considered in the waiver analysis process.

c. This waiver will be granted if and only if the design control authority (LILE) can establish the qualifications of the offerer through the evaluation of written inputs from the offerer or from previous knowledge of the offerer's capabilities or from previous experience with the offerer on similar item acquisitions. If there is any doubt about the offerer's capability, the offerer will be required to submit a pre-qualification article. There is no guarantee of qualification by similarity. LILE reserves the right to require a pre-qualification article of all offerers.

2. The current acquisition need not and will not be delayed in order to provide an offerer with an opportunity to meet the requirements for qualification waiver.

3. Maximum time for approval of qualification by similarity will not exceed 15 days.

SPECIAL PACKAGING INSTRUCTION			CODE ID N/A	SPI NO. (TPO) 00-133-4993																																																																
			SHEET 1 OF 3																																																																	
PART OR DRAWING NO. N/A	NATIONAL STOCK NO. 1620-00-133-4993	CURRENT REV B	ILL D. HEISE <i>D. Heise</i> CHK C. KLEEB <i>Cathy A Kleeb</i> ENGR S. MORAN <i>S. Moran</i> AUTH R. ELBRADER <i>R. Elbrader</i>																																																																	
ITEM NOMENCLATURE AXLE M.L.G. C-5		ORIGINAL DATE 81139																																																																		
PRESERVATION IAW MIL-P-116 LEVEL A I LEVEL B I LEVEL C I CLEANING C-1 DRYING D-1 PRESERVATIVE MIL-P-3420 OR EQUAL		PACKING AS SPECIFIED BELOW AND BILL OF MATERIALS <table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th>LEVEL</th> <th>SPEC</th> <th>STYLE</th> <th>TYPE</th> <th>CL</th> <th>VAR</th> <th>GR</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>PPP-B-601 (MOD)</td> <td>A</td> <td>OS</td> <td>N/A</td> <td>N/A</td> <td>B</td> </tr> <tr> <td>B</td> <td>PPP-B-601 (MOD)</td> <td>A</td> <td>DOM</td> <td>N/A</td> <td>N/A</td> <td>B</td> </tr> <tr> <td>C</td> <td>PPP-B-601 (MOD)</td> <td>A</td> <td>DOM</td> <td>N/A</td> <td>N/A</td> <td>B</td> </tr> </tbody> </table> <table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th>LEVEL A</th> <th>LEVEL B</th> <th>LEVEL C</th> </tr> </thead> <tbody> <tr> <td>GROSS CU FT</td> <td>10.</td> <td>10.</td> <td>10.</td> </tr> <tr> <td>GROSS WT LBS</td> <td>182</td> <td>182</td> <td>182</td> </tr> <tr> <td>DESIGN FRAGILITY</td> <td>110 G.</td> <td>110 G.</td> <td>110 G.</td> </tr> </tbody> </table> <table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th>LENGTH</th> <th>WIDTH</th> <th>DEPTH</th> </tr> </thead> <tbody> <tr> <td>CTNR I.D.</td> <td>48 1/2 IN.</td> <td>16 IN.</td> <td>13 1/2 IN.</td> </tr> <tr> <td>CTNR O.D.</td> <td>50 1/2 IN.</td> <td>18 IN.</td> <td>19 IN.</td> </tr> <tr> <td>ITEM DIM</td> <td>45 1/2 IN.</td> <td>12 1/2 IN.</td> <td>10 3/4 IN.</td> </tr> <tr> <td>ITEM WT LBS</td> <td>110</td> <td></td> <td></td> </tr> </tbody> </table>			LEVEL	SPEC	STYLE	TYPE	CL	VAR	GR	A	PPP-B-601 (MOD)	A	OS	N/A	N/A	B	B	PPP-B-601 (MOD)	A	DOM	N/A	N/A	B	C	PPP-B-601 (MOD)	A	DOM	N/A	N/A	B		LEVEL A	LEVEL B	LEVEL C	GROSS CU FT	10.	10.	10.	GROSS WT LBS	182	182	182	DESIGN FRAGILITY	110 G.	110 G.	110 G.		LENGTH	WIDTH	DEPTH	CTNR I.D.	48 1/2 IN.	16 IN.	13 1/2 IN.	CTNR O.D.	50 1/2 IN.	18 IN.	19 IN.	ITEM DIM	45 1/2 IN.	12 1/2 IN.	10 3/4 IN.	ITEM WT LBS	110		
LEVEL	SPEC	STYLE	TYPE	CL	VAR	GR																																																														
A	PPP-B-601 (MOD)	A	OS	N/A	N/A	B																																																														
B	PPP-B-601 (MOD)	A	DOM	N/A	N/A	B																																																														
C	PPP-B-601 (MOD)	A	DOM	N/A	N/A	B																																																														
	LEVEL A	LEVEL B	LEVEL C																																																																	
GROSS CU FT	10.	10.	10.																																																																	
GROSS WT LBS	182	182	182																																																																	
DESIGN FRAGILITY	110 G.	110 G.	110 G.																																																																	
	LENGTH	WIDTH	DEPTH																																																																	
CTNR I.D.	48 1/2 IN.	16 IN.	13 1/2 IN.																																																																	
CTNR O.D.	50 1/2 IN.	18 IN.	19 IN.																																																																	
ITEM DIM	45 1/2 IN.	12 1/2 IN.	10 3/4 IN.																																																																	
ITEM WT LBS	110																																																																			
MARKING IAW MIL-STD-129 SPECIAL MARKING: A) SPI NO. 00-133-4993 MARK 00-133-4993 ON ONE SIDE OF CONT.																																																																				
<div style="float: right; border: 1px solid black; padding: 5px; margin-top: 10px;"> REVISIONS <table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th>LTR</th> <th>DESCRIPTION</th> <th>DATE</th> <th>APRVD</th> </tr> </thead> <tbody> <tr> <td>B</td> <td>CHANGED FROM NARRATIVE TO DISCRETE.</td> <td>83262</td> <td>OK</td> </tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> </tbody> </table> </div>					LTR	DESCRIPTION	DATE	APRVD	B	CHANGED FROM NARRATIVE TO DISCRETE.	83262	OK																																																								
LTR	DESCRIPTION	DATE	APRVD																																																																	
B	CHANGED FROM NARRATIVE TO DISCRETE.	83262	OK																																																																	
CLOSURE 1 A/W: THIS DRAWING																																																																				

PART NO.	QTY REQD	NOMENCLATURE OR DESCRIPTION	SIZE	MATERIAL SPECIFICATION
-12	3	BANDING STRAPS	5/8 X A/R	STEEL, CL 1, TYP 1, REG DUTY, FIN A, 00-S-781
-11	2	TAPE	1/2 X A/R	NYLON REINFORCED, TYPE IV, PPP-T-97
-10	2	WRAP	A/R	POLYOLEFIN, TYP 1, CL 1, GR A, FIN 1, L-P-378
-9	2	BARRIER	A/R	PAPER, VPI, TYP 1, CL 1, STY. C, MIL-P-3420
-8	4	CHAFFING STRIP	3 X A/R	PAPER, TYPE 1, PPP-P-115 OR EQUAL
-7	4	SADDLE (TOP)	15 7/8 X 6 1/2 X 5/16	PLYWOOD, GROUP B, NN-P-530
-6	4	SADDLE (BTM)	15 7/8 X 7 X 5/16	PLYWOOD, GROUP B, NN-P-530
-5	4	CORNER BLKS	6 X 6 X 1/2 (SEE DET)	PLYWOOD, GROUP B, NN-P-530
-4	8	CLEATS	13 1/2 X 2 1/2 X 3/4	PLYWOOD, GROUP B, NN-P-530
-3	2	SADDLE, TOP	2 X 6 1/2 X 15/8	WOOD, CLASS 2, MIL-STD-731
-2	2	SADDLE, BTM	2 X 7 X 15/8	WOOD, CLASS 2, MIL-STD-731
-1	3	SKIDS	4 X 4 (NOM) X 18	WOOD, CLASS 2, MIL-STD-731

SPI NO. 00-133-4993

SPECIAL PACKAGING INSTRUCTION


(CONTINUATION SHEET)

CODE ID
N/A

SPI NO. (TPO)
00-133-4993

ITEM NOMENCLATURE
AXLE M.L.G. C-5

SHEET 2 OF 3

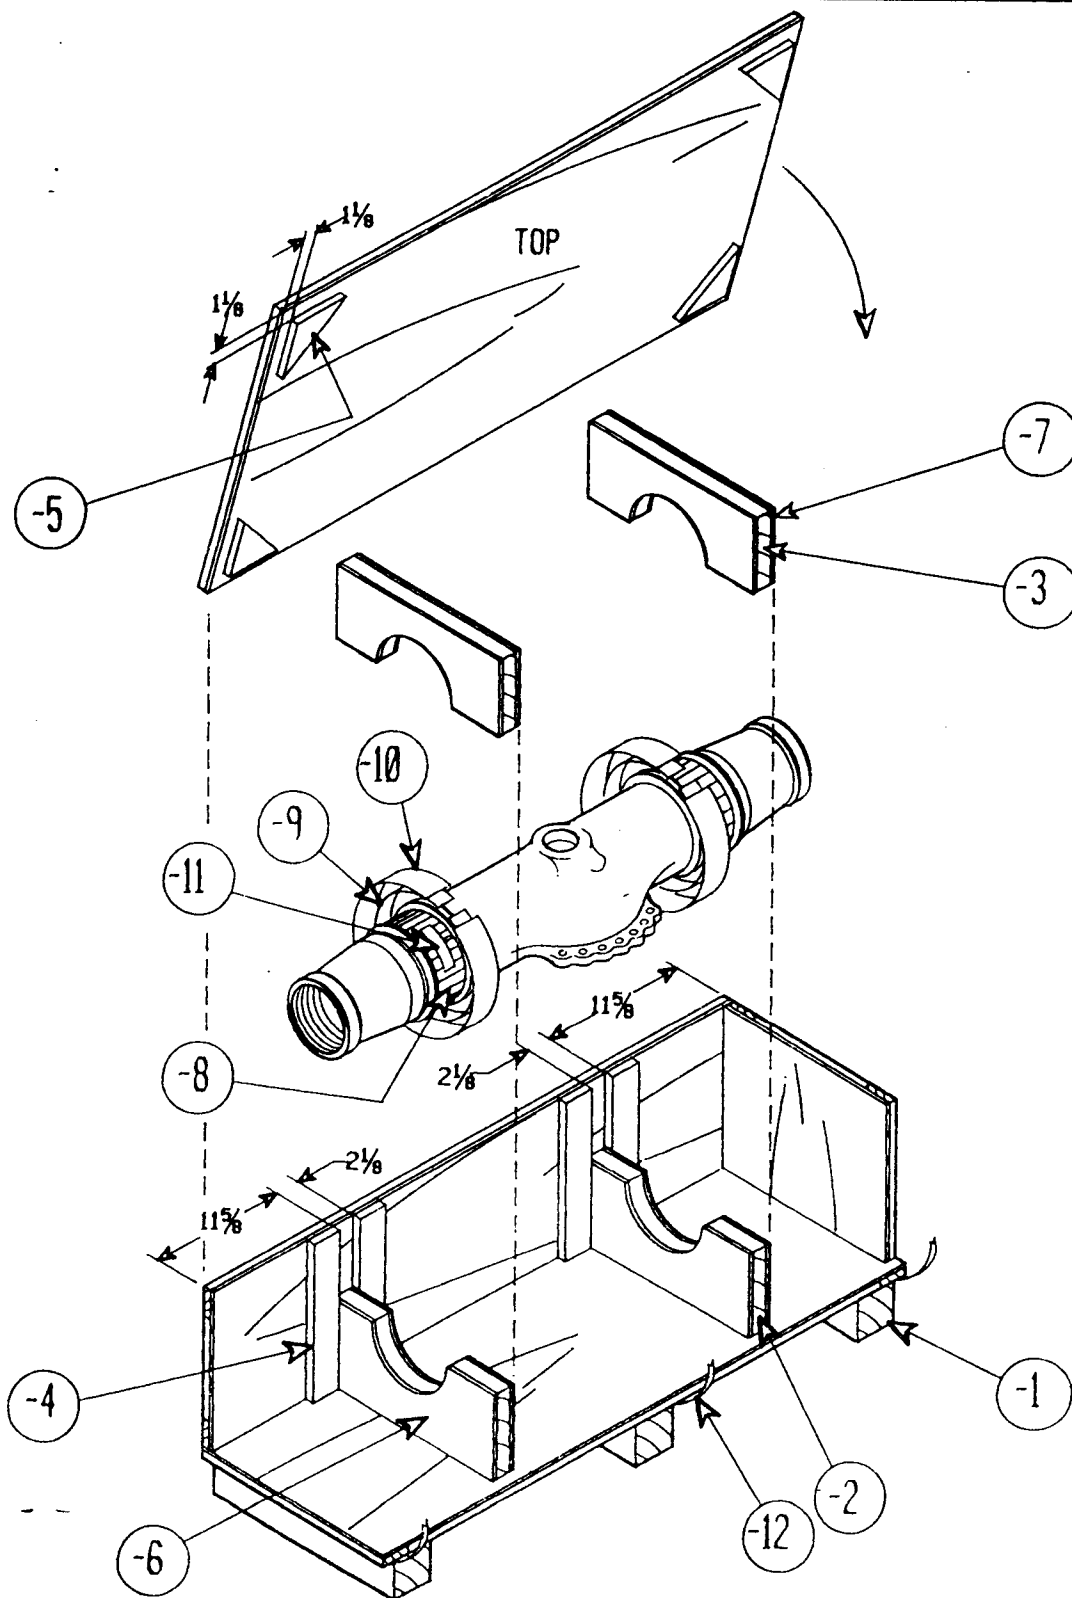

SPECIAL PACKAGING INSTRUCTION

(CONTINUATION SHEET)

CODE ID

N/A




SPI NO. (TPO)

00-133-4993

ITEM NOMENCLATURE

AXLE M.L.G. C-5

SHEET 3 OF 3

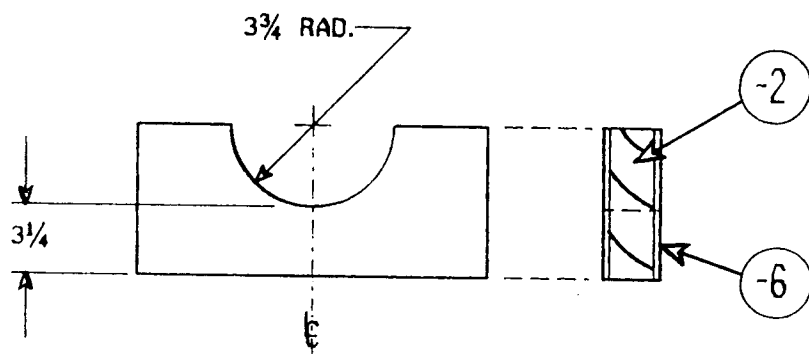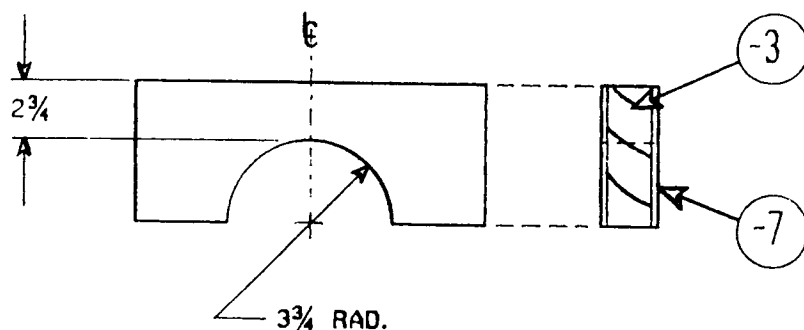

NOTES:

1. SECURE REF-6 AND -7 TO -2 AND -3 WITH LID NAILS. ALSO SECURE REF-4 AND-5 TO CONTAINER WITH 6D NAILS. ALL NAILS WILL CONFORM TO FF-N-105, TYPE-II, STYLE 1.
2. COVER CRITICAL AREAS WITH REF-9 AND OVERWRAP WITH REF-10. SECURE REF-9 AND-10 WITH -11.
3. DO NOT NAIL LID TO CONTAINER. USE BANDING, REF.-12 ONLY.